



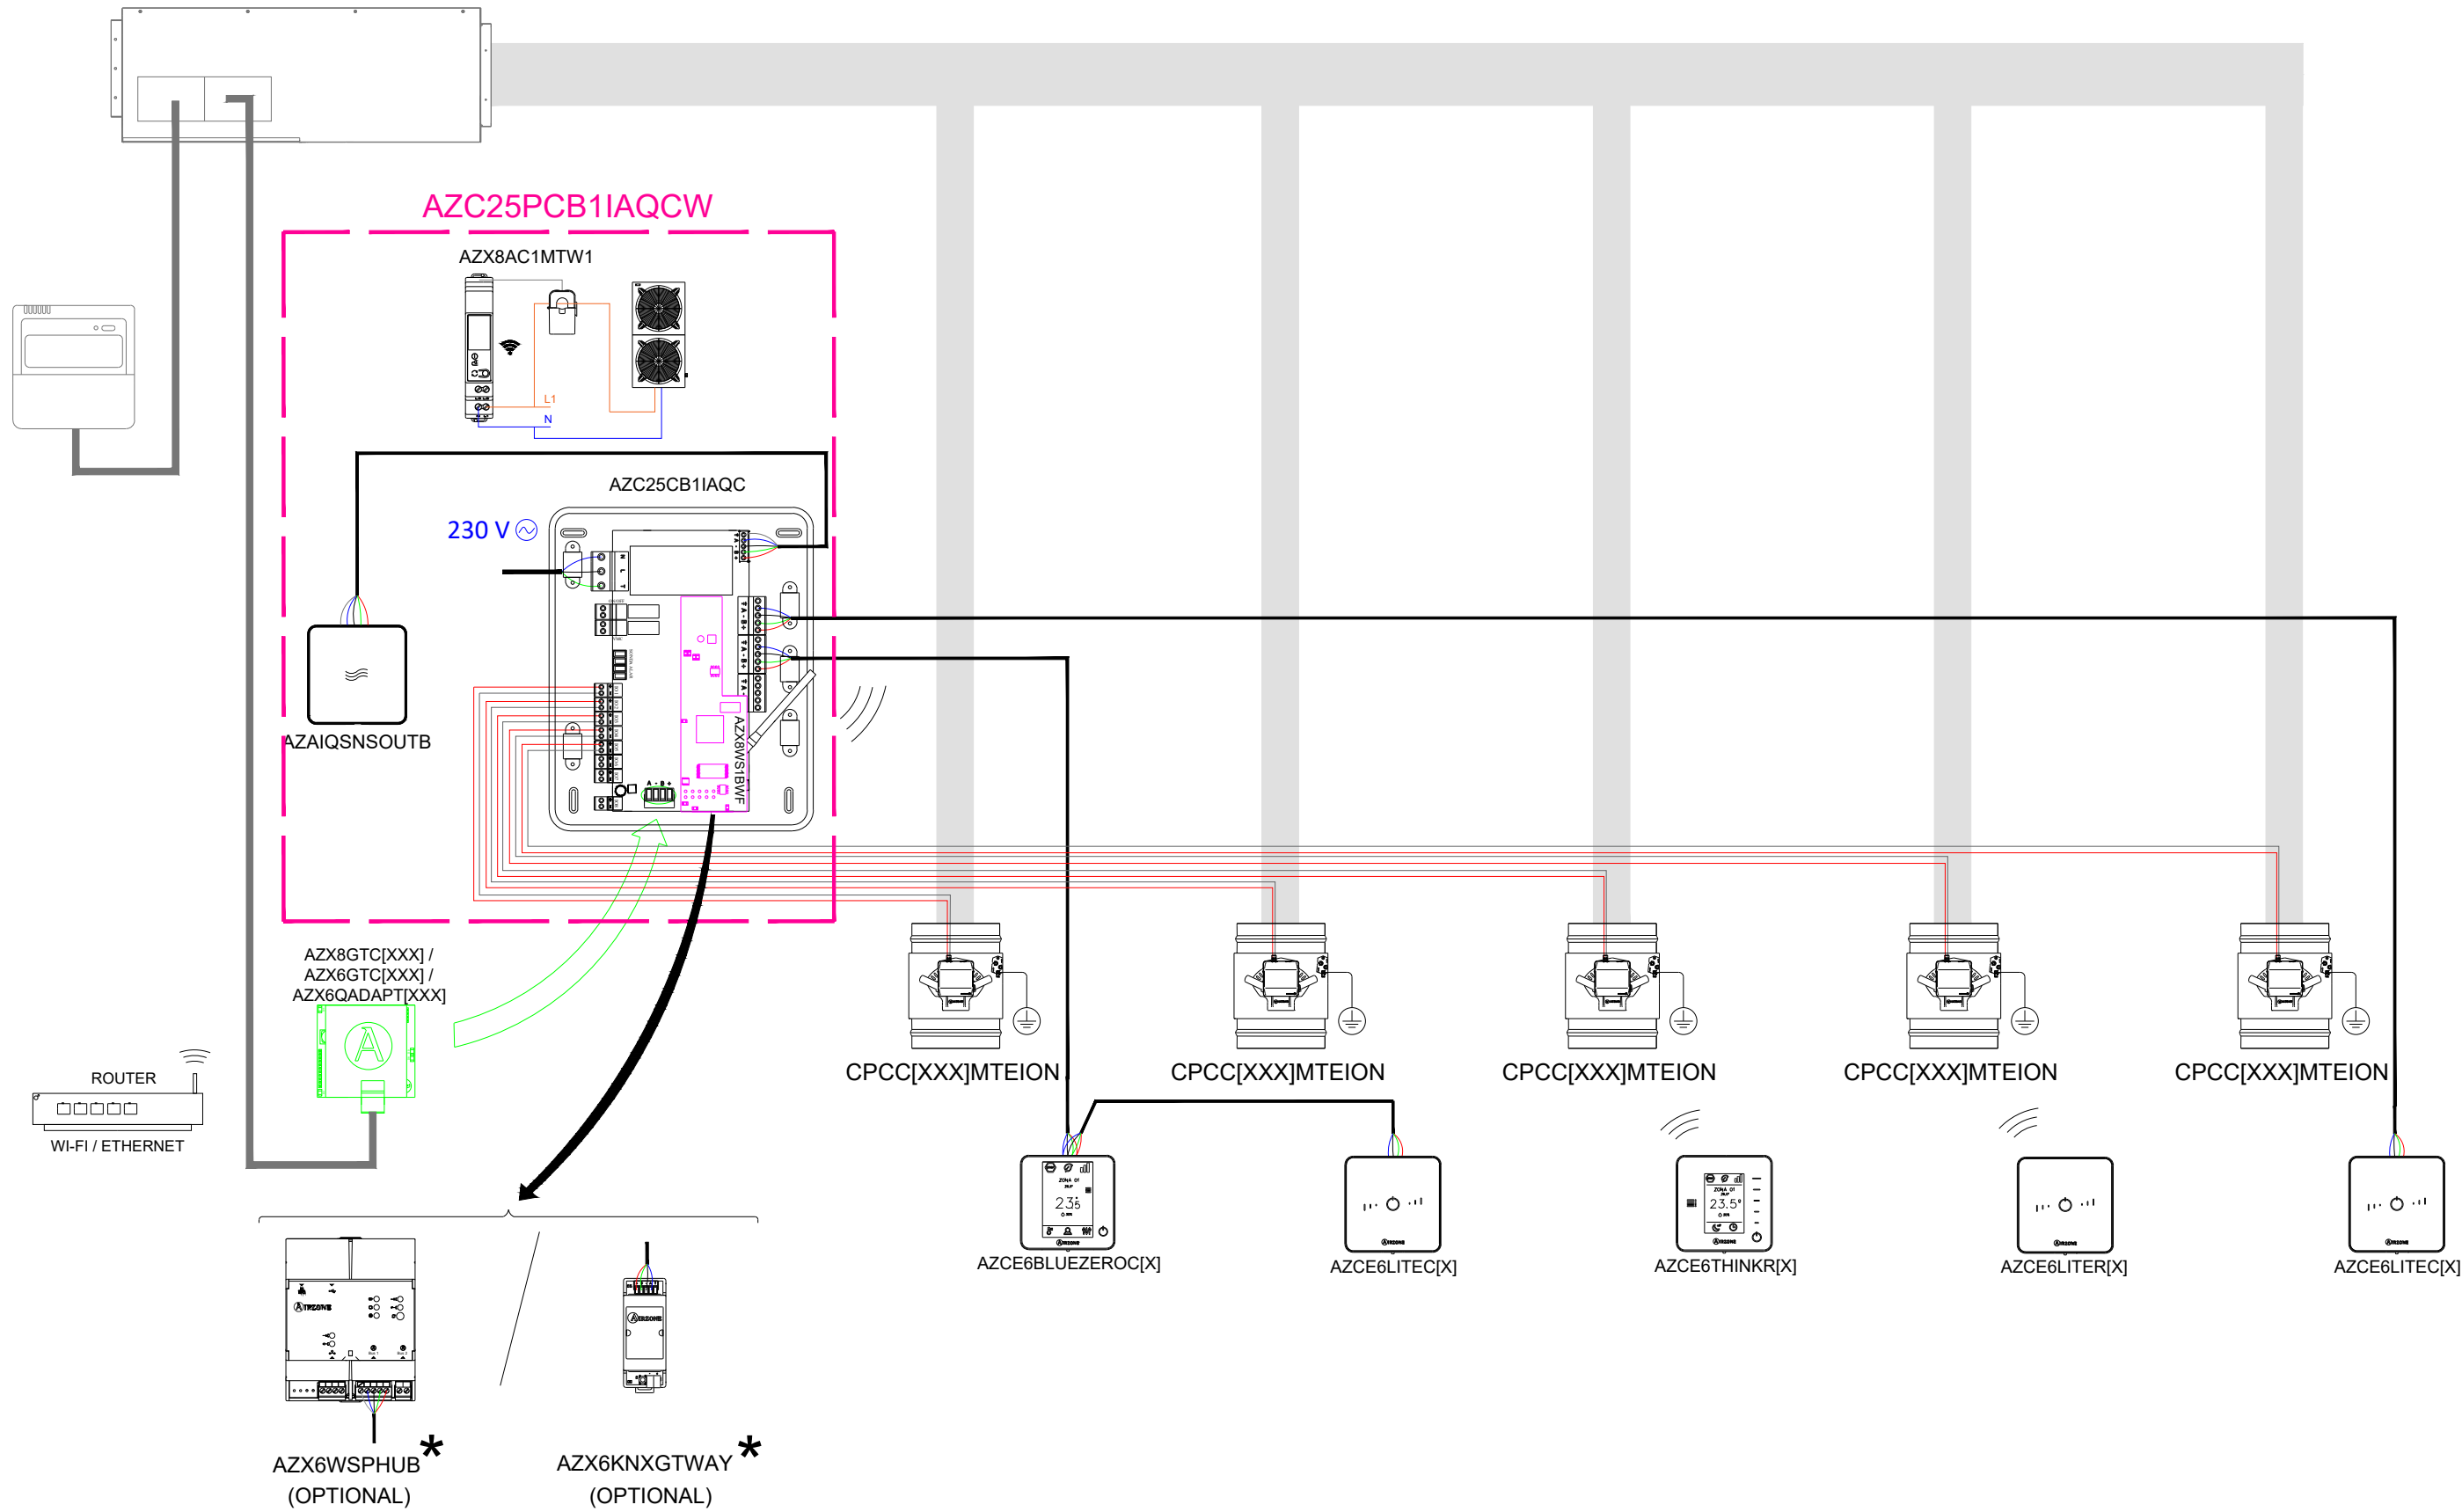

* TO CONECT THIS DEVICE, IT IS NECESSARY TO REMOVE THE INCLUDED WEBSERVER [AZX8WS1BWF]

NOTE: FLEXA25 PACK IS ALSO AVAILABLE WITH WEBSERVER HUB [AZC25PCB1IAQCH]

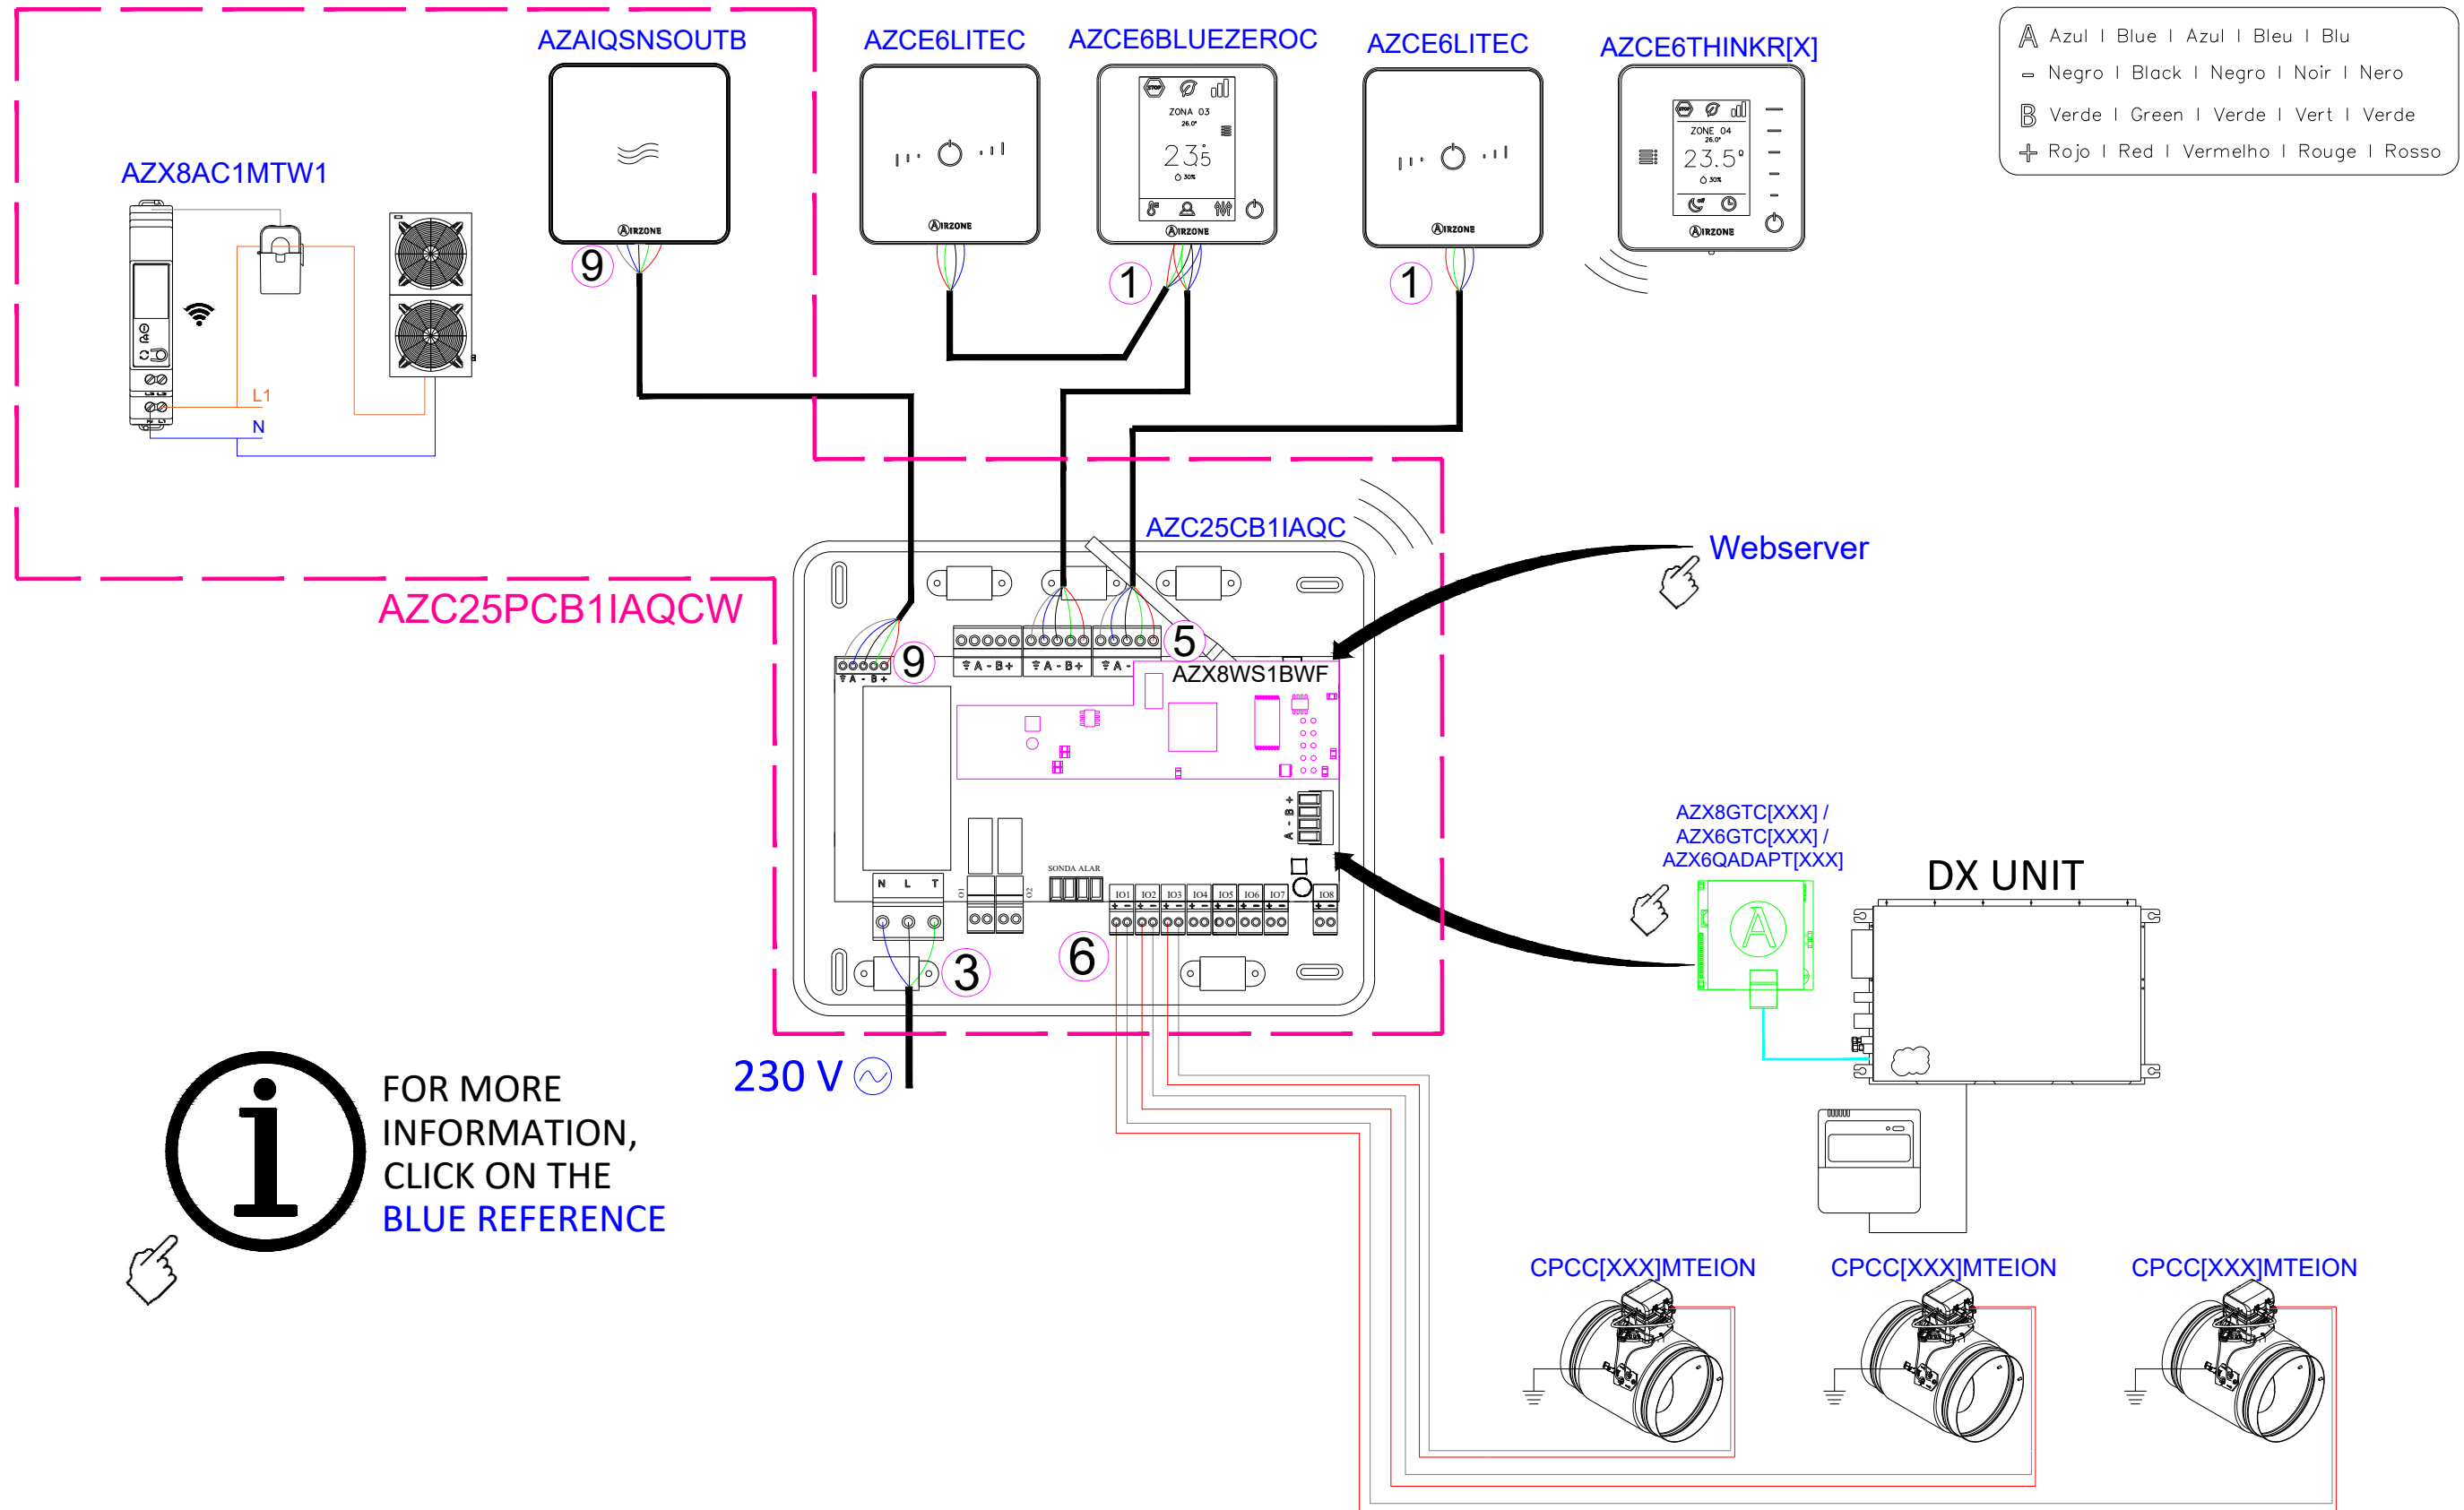

i FOR MORE INFORMATION, CLICK ON THE BLUE REFERENCE

- 1 2 x 0.22 + 2 x 0.5 mm²
- 2 2 x 0.22 + 2 x 0.5 mm²
- 3 3 x 1.5 mm²
- 4 2 x 0.22 mm²
- 5 2 x 0.22 + 2 x 0.5 mm²
- 6 2 x 0.75 mm²
- 7 2 x 0.22 mm²
- 8 2 x 0.22 + 2 x 0.5 mm²
- 9 2 x 0.22 + 2 x 0.5 mm²

- N Neutro | Neutral | Neutro | Neutre | Neutro
- L Fase | Phase | Fase | Phase | Fase
- Tierra | Ground | Terra | Terre | Terra

FLEXA 25

[ES] - EQUIPO INVERTER DE CONDUCTOS CIRCULARES ZONIFICADO HASTA 8 ZONAS

[EN] - ZONED INVERTER UNIT WITH CIRCULAR DUCT UP TO 8 ZONES

[PT] - UNIDADE INVERTER DE CONDUTAS CIRCULARES ZONIFICADA ATÉ 8 ZONAS

[FR] - UNITÉ GAINABLE INVERTER FLEXIBLE AVEC RÉGULATION MULTIZONE JUSQU'À 8 ZONES

[IT] - UNITÀ CANALIZZATA AD ESPANSIONE DIRETTA CON CONDOTTO FLESSIBILE FINO A 8 ZONE

[DE] - INVERTERGERÄTE MIT KREISFÖRMIGEN KANÄLEN BIS ZU 8 ZONEN

	ESPAÑOL [ES]	ENGLISH [EN]	PORTUGUÊS [PT]
AZC25PCB1IAQCW	PACK CENTRAL FLEXA 25 + WEBSERVER [AZX8WSIBWF] + AIRQ SENSOR + CABLE BUS 15M + MEDIDOR DE CONSUMO	PACK MAIN BOARD FLEXA 25 + WEBSERVER [AZX8WSIBWF] + AIRQ SENSOR + BUS CABLE 15M + ELECTRIC METER	PACK CENTRAL FLEXA 25 + WEBSERVER [AZX8WSIBWF] + AIRQ SENSOR + CABO DE BARRAMENTO 15M + MEDIDOR DE CONSUMO
AZCE6BLUEZEROC[X]	TERMOSTATO AIRZONE BLUEFACE ZERO [COLOR]	AIRZONE BLUEFACE ZERO [COLOUR] THERMOSTAT	TERMOSTATO BLUEFACE ZERO [COR] AIRZONE
AZCE6THINKR[X]	TERMOSTATO AIRZONE THINK RADIO [COLOR]	AIRZONE THINK [COLOUR] THERMOSTAT WIRELESS	TERMOSTATO RADIO]THINK [COR] AIRZONE
AZCE6LITE[C/R][X]	TERMOSTATO AIRZONE LITE [CABLE/RADIO] [COLOR]	AIRZONE LITE [COLOUR] THERMOSTAT [WIRED/WIRELESS]	TERMOSTATO [CABO/RADIO] LITE [COR] AIRZONE
AZX8GTC[XXX] / AZX6GTC[XXX] / AZX6QADAPT[XXX]	PASARELA DE COMUNICACIONES	GATEWAY	GATEWAY COMUNICAÇÕES
CPCC[XXX]MTEION	COMPUERTA MOTORIZADA AIRZONE CON IONIZACIÓN PARA CONDUCTO CIRCULAR [DIÁMETRO]	AIRZONE MOTORIZED DAMPER WITH IONIZATION FOR ROUND DUCT [SIZE]	REGISTO MOTORIZADO AIRZONE COM IONIZAÇÃO PARA CONDUCTA CIRCULAR [TAMANHO]
NOTES	1- Verifique el fabricante de la unidad interior para seleccionar el modelo de la pasarela 2- La distancia máxima para la conexión del cable de la pasarela es de 5 metros	1- Check indoor unit manufacturer to select the correct gateway model 2- Maximum distance for gateway cable connectio is 5 meters	1- Verifique o fabricante da unidade interna para selecionar o modelo de gateway correto 2- A distância máxima para a conexão do cabo do gateway é de 5 metros

	FRANÇAIS [FR]	ITALIANO [IT]	DEUTSCH [DE]
AZC25PCB1IAQCW	PACK PLATINE FLEXA 25 + WEBSERVER [AZX8WSIBWF] + AIRQ CAPTEUR + 2 CÂBLE BUS 15M + COMPTEUR DE CONSOMMATION	PACK SCHEDA CENTRALE FLEXA 25 + WEBSERVER [AZX8WSIBWF] + AIRQ SENSORE + 2 CAVO COLLEGAMENTO 15M + CONTATORE DEL CONSUMATORE	PACK SYSTEMZENTRALE FLEXA 25 + WEBSERVER [AZX8WSIBWF] + AIRQ RAUMLUFTQUALITÄTSFÜHLER + 2 BUS-KABEL 15M + VERBRAUCHSZÄHLER
AZCE6BLUEZEROC[X]	THERMOSTAT [COULEUR] AIRZONE BLUEFACE ZERO	TERMOSTATO [COLORE] AIRZONE BLUEFACE ZERO	AIRZONE BLUEFACE ZERO [FARBE] THERMOSTAT
AZCE6THINKR[X]	THERMOSTAT [COULEUR] AIRZONE THINK RADIO	TERMOSTATO RADIO THINK [COLOR] AIRZONE	AIRZONE THINK [FARBE] THERMOSTAT FUNK
AZCE6LITE[C/R][X]	THERMOSTAT [COULEUR] AIRZONE LITE [FILAIRE/RADIO]	TERMOSTATO [CAVO/RADIO] LITE [COLORE] AIRZONE	AIRZONE LITE [FARBE] THERMOSTAT [VERKABELT/FUNK]
AZX8GTC[XXX] / AZX6GTC[XXX] / AZX6QADAPT[XXX]	PASSERELLE DE COMMUNICATION	INTERFACCIA DI COMUNICAZIONE	KOMMUNIKATIONS GATEWAY
CPCC[XXX]MTEION	REGISTRE MOTORISE AIRZONE AVEC IONISATION POUR GAINÉ CIRCULAIRE [TAILLE]	SERRANDA MOTORIZZATA AIRZONE CON IONIZZAZIONE PER CONDOTTO CIRCOLARE [DIMENSIONE]	AIRZONE MOTORISCHE Klappe MIT IONISIERUNG FÜR RUNDE LUFTKANÄLE [GRÖSSE]
NOTES	1- Vérifiez le fabricant de l'unité intérieure pour sélectionner le modèle de passerelle correct 2- La distance maximale pour la connexion du câble de la passerelle est de 5 mètres	1- Verificare il produttore dell'unità interna per selezionare il modello della interfaccia 2- La distanza massima per la connessione del cavo del gateway è di 5 metri	1- Überprüfen Sie den Hersteller des Innengeräts, um das richtige Gateway-Modell auszuwählen 2- Die maximale Entfernung für die Gateway-Kabelverbindung beträgt 5 Meter

ÍNDICE / INDEX / ÍNDICE / INDEX / INDICE / INHALT						
PAG.	ESPAÑOL [ES]	ENGLISH [EN]	PORTUGUÊS [PT]	FRANÇAIS [FR]	ITALIANO [IT]	DEUTSCH [DE]
1	ESQUEMA DE INSTALACIÓN	WIRING DIAGRAM	ESQUEMA DE INSTALAÇÃO	SCHÉMA D'INSTALLATION	SCHEMA D' INSTALLAZIONE	INSTALLATIONSVERBINDUNGS SCHEMA
2	ESQUEMA DETALLADO	DETAIL DIAGRAM	ESQUEMA DETALHADO	SCHÉMA DE DÉTAIL	SCHEMA DI DETTAGLIO	DETAIL-DIAGRAMM
3	HOJA DE REFERENCIA / LEYENDA	REFERENCE SHEET / LEGEND	FOLHA DE REFERÊNCIA / LEGENDA	FEUILLE DE RÉFÉRENCE / LÉGENDE	FOGLIO DI RIFERIMENTO / LEGENDA	REFERENZBLATT / LEGENDE